


**LISO POLIDO MOD. 140**

Units: mm

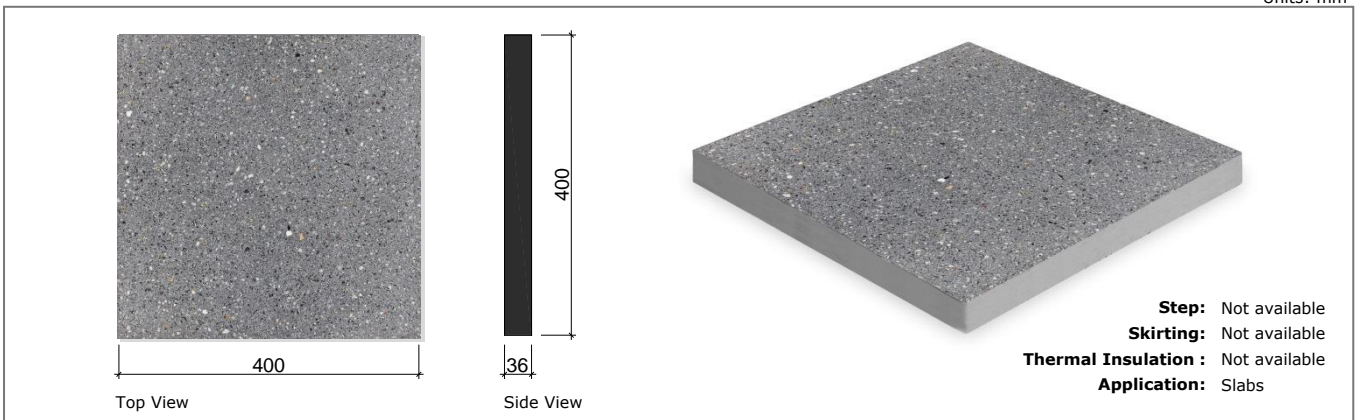

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.

**Product Features and Palletization**
**EN 1339 – “Concrete paving flags – Requirements and test methods”**

Dimensions	400x400x36	Intended use	Internal Flooring	External Flooring
Average weight/sqm	75 kg	Emission of asbestos	Pass	Not Relevant
Sqm/Pallet	25,92 Sqm	Breaking Strength (MPa)	≥3,5	≥ 3,5
Items/Sqm	6,25 units	Slip/ Skid Resistance	USRV ≥ 35	USRV ≥ 35
Items/Pallet	162 units	Thermal Conductivity [W/(mk)]	1,24	Not Relevant
Sqm/Items	0,16 sqm	External fire performance	Not Relevant	Not Relevant
Average weight/Items	13 kg	Durability	Satisfactory	Satisfactory
Average weight/Pallet	2100 kg	Reaction to fire	Classe A1	Not Relevant
Approved: Vítor Silva	Elaborate: Renato Araújo	PTDS nº: LISPO_001_EN	Date: 27/03/2017	