


**PEDRAS TOSCAS**

units: mm

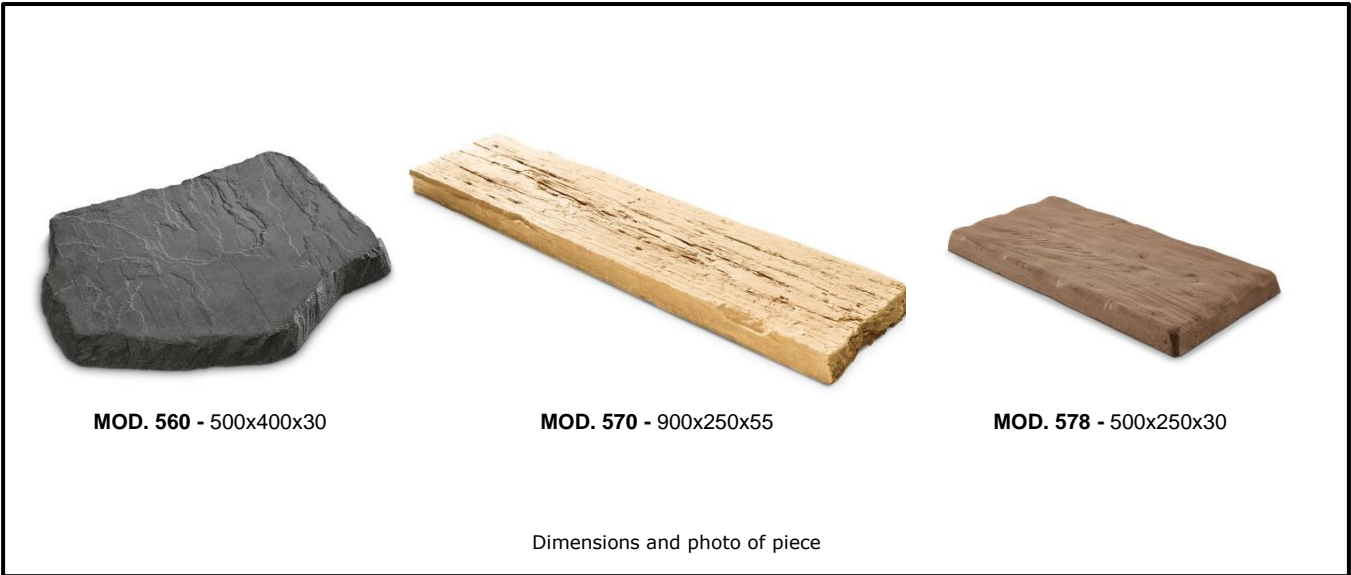

Product characteristics and package				Technical Specifications		
				EN 1339 – “Concrete paving flags – Requirements and test methods”		
<b>Colors Available</b>	560/2 570/2 578/2	560/4 570/4 578/4	560/7 570/7 578/7	<b>Intended use</b>	<b>Internal Flooring</b>	<b>External Flooring</b>
<b>Model Pedra Tosca</b>	<b>MOD. 560</b>	<b>MOD. 570</b>	<b>MOD. 578</b>	<b>Emission of asbestos</b>	Pass	Not Relevant
<b>Quantity per Pallet</b>	-	-	-	<b>Breaking Strength (MPa)</b>	≥ 3,5	≥ 3,5
<b>Items/sqm</b>	-	-	-	<b>Slip/ Skid Resistance</b>	Satisfactory	Satisfactory
<b>Items/Pallet</b>	76 units	48 units	96 units	<b>Thermal Conductivity [W/(mk)]</b>	1,24	Not Relevant
<b>Average weight/Item</b>	12 kg	20 kg	8,5 kg	<b>External fire performance</b>	Not Relevant	Not Relevant
<b>Average weight/sqm</b>	-	-	-	<b>Durability</b>	Satisfactory	Satisfactory
<b>Average weight/Pallet</b>	912 kg	960 kg	816 kg	<b>Reaction to fire</b>	Classe A1	Not Relevant
<b>Approved</b> Vitor Silva	<b>Elaborate</b> Bruno Veloso			<b>PTDS n°:</b> PTOS_001_EN	<b>Date</b> 05-08-2016	