

PORTUCALE FLOORING (MOD. 700)



units: mm



Product characteristics and package		Technical Specifications		
Colors Available		EN 1339 – "Concrete paving flags – Requirements and test methods"		
Dimensions	500 x 500 x 25	Intended use	Internal Flooring	External Flooring
Quantity per Pallet	20 sqm	Emission of asbestos	Pass	Not Relevant
Quantity per sqm	4 units	Breaking Strength (MPa)	≥ 3,5	≥ 3,5
Items/Pallet	80 units	Slip/ Skid Resistance	Satisfactory	Satisfactory
Average weight/Items	14 kg	Thermal Conductivity [W/(mk)]	1,24	Not Relevant
Average weight/sqm	56 kg	External fire performance	Not Relevant	Not Relevant
Average weight/Pallet	1120 kg	Durability	Satisfactory	Satisfactory
Approved Vitor Silva	Elaborate Bruno Veloso	Reaction to fire	Classe A1	Not Relevant
		PTDS n°: PAV_700_EN	Date 10-08-2016	

PORTUCALE 600x450x25 | 450x450x25 | 450x300x25 (MOD. 750 – 3 Formats)


units: mm

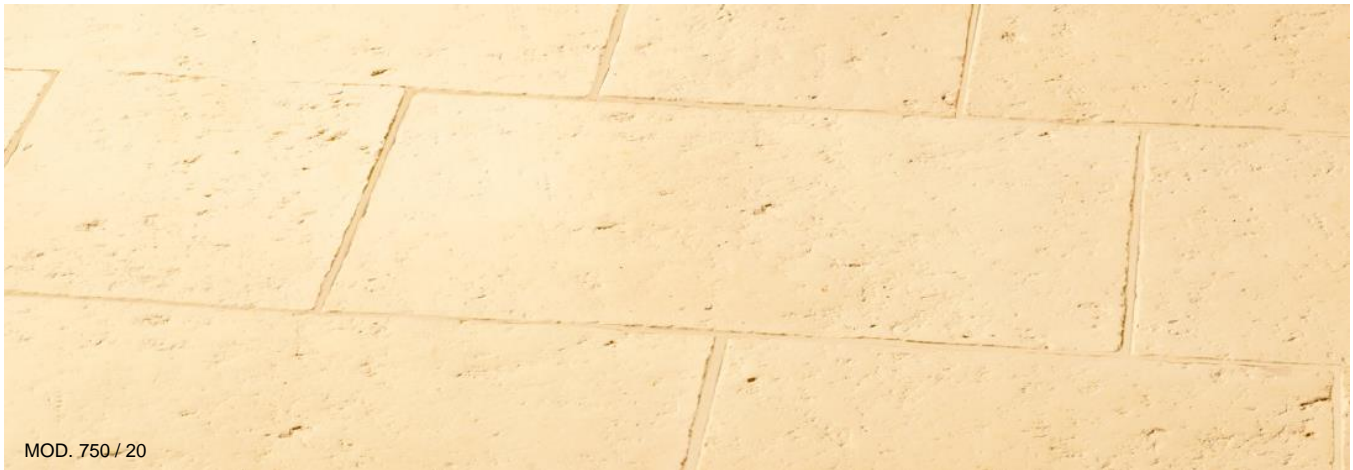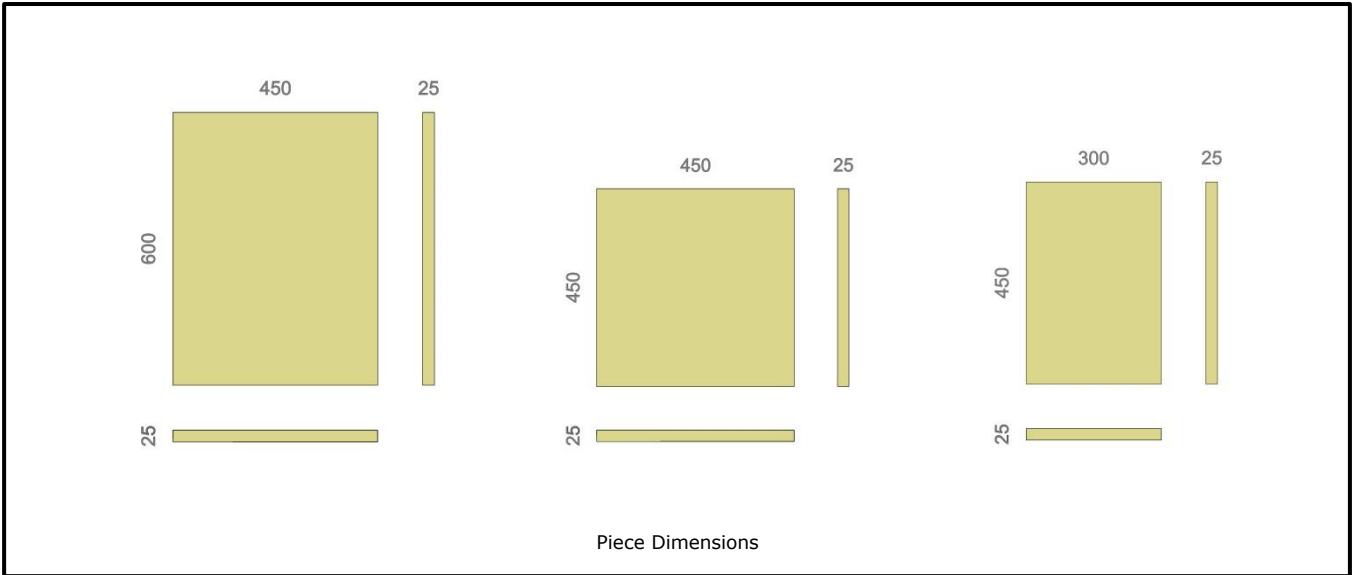

Product characteristics and package		Technical Specifications		
Colors Available 00 10 20 30 40		EN 1339 – "Concrete paving flags – Requirements and test methods"		
Dimensões	600 x 450 450 x 450 450 x 300 Thickness 25	Intended use	Internal Flooring	External Flooring
Quantity per Pallet	17,92 sqm	Emission of asbestos	Pass	Not Relevant
Quantity per Module	1,28 sqm	Breaking Strength (MPa)	≥ 3,5	≥ 3,5
Module/Pallet	14 modules 3 units – 600x450x25 1 units – 450x450x25 2 units – 450x300x25	Slip/ Skid Resistance	Satisfactory	Satisfactory
		Thermal Conductivity [W/(mk)]	1,24	Not Relevant
Average weight/sqm	54 kg	External fire performance	Not Relevant	Not Relevant
Average weight/Pallet	1000 kg	Durability	Satisfactory	Satisfactory
Approved Vitor Silva	Elaborate Bruno Veloso	Reaction to fire	Classe A1	Not Relevant
		PTDS n°: PORT3_001_EN	Date 09-09-2016	

PORTUCALE 600x450 | 600x300 | 450x450 | 450x300 | 300x300 (MOD. 730 – 5 Formats)


units: mm

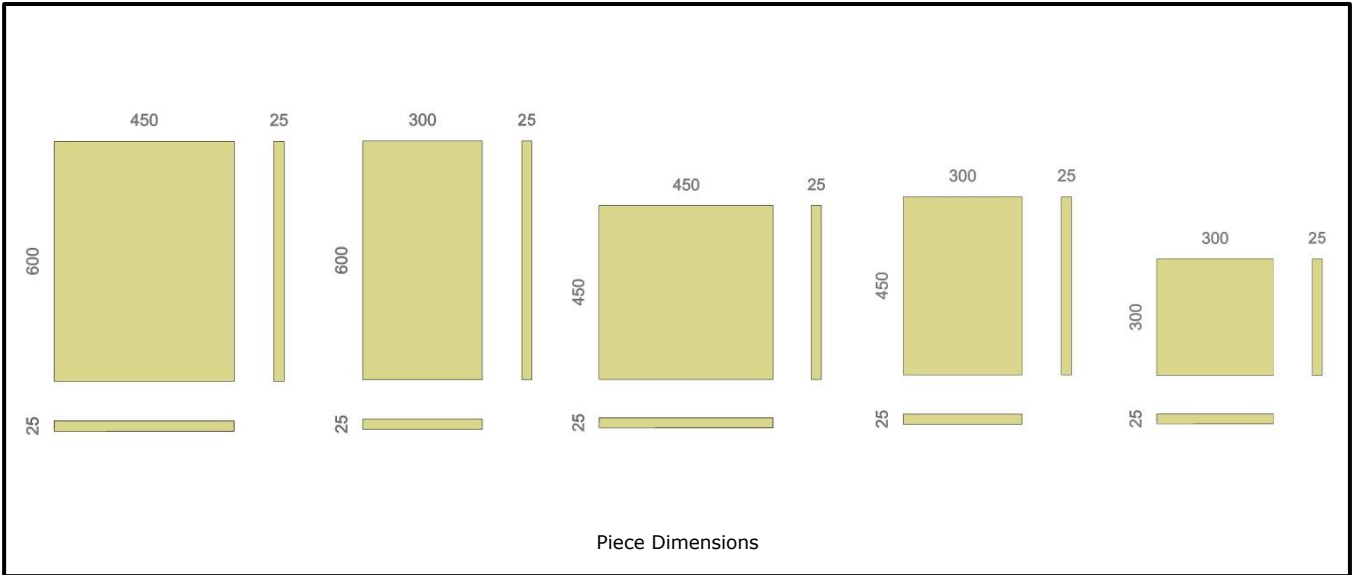

Product characteristics and package		Technical Specifications		
Colors Available		EN 1339 – "Concrete paving flags – Requirements and test methods"		
Dimensions (thickness 25)	600 x 450 600 x 300 450 x 450 450 x 300 300 x 300	Intended use	Internal Flooring	External Flooring
Quantity per Pallet	18,40 sqm	Emission of asbestos	Pass	Not Relevant
Quantity per Module	1,15sqm	Breaking Strength (MPa)	≥ 3,5	≥ 3,5
Module/Pallet	16 modules 1 module 2 units – 600x450x25 1 units – 450x450x25 1 units – 450x300x25 1 units – 600x300x25 1 units – 300x300x25	Slip/ Skid Resistance	Satisfactory	Satisfactory
Average weight/sqm	56 kg	Thermal Conductivity [W/(mk)]	1,24	Not Relevant
Average weight/Pallet	1060 kg	External fire performance	Not Relevant	Not Relevant
Approved Vitor Silva	Elaborate Bruno Veloso	Durability	Satisfactory	Satisfatório
		Reaction to fire	Classe A1	Not Relevant
		PTDS n°: PORT5_001_EN	Date 09-09-2016	

PORTUCALE 600x600 | 600x450 | 600x300 | 450x450 | 450x300 | 300x300 (MOD. 760 – 6 Formats)

units: mm

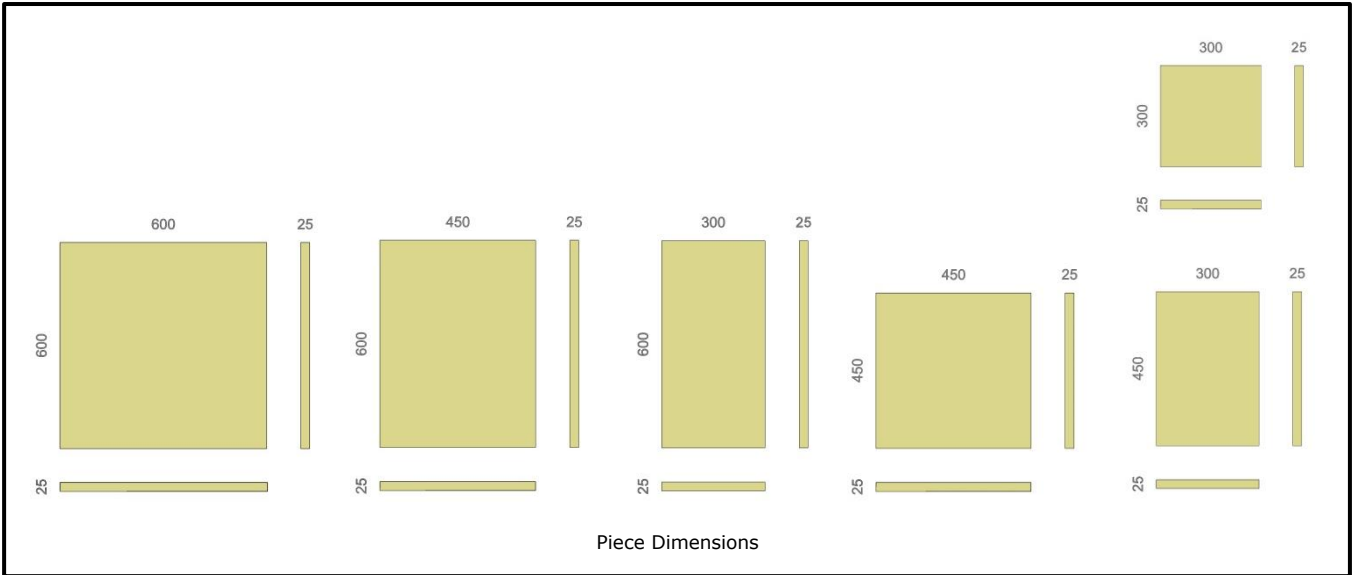

Product characteristics and package		Technical Specifications		
Colors Available		EN 1339 – "Concrete paving flags – Requirements and test methods"		
Dimensions (thickness 25)	600 x 600 600 x 450 600 x 300 450 x 450 450 x 300 300 x 300	Intended use	Internal Flooring	External Flooring
Quantity per Pallet	19,60 sqm	Emission of asbestos	Pass	Not Relevant
Quantity per Module	1,96 sqm	Breaking Strength (MPa)	≥ 3,5	≥ 3,5
Module/Pallet	10 Modules 1 module: <ul style="list-style-type: none"> 1 Units - 600x600x25 3 Units - 600x450x25 1 Units - 450x450x25 1 Units - 450x300x25 2 Units - 600x300x25 1 Units - 300x300x25 	Slip/ Skid Resistance	Satisfactory	Satisfactory
Average weight/sqm	56 kg	Thermal Conductivity [W/(mk)]	1,24	Not Relevant
Average weight/Pallet	1130 kg	External fire performance	Not Relevant	Not Relevant
Approved Vitor Silva	Elaborate Bruno Veloso	Durability	Satisfactory	Satisfactory
		Reaction to fire	Classe A1	Not Relevant
		PTDS n°: PORT6_001_EN	Date 09-09-2016	