


**ROMANO 600x450x30 | 450x450x30 | 450x300x30 (MOD. 740)**

units: mm

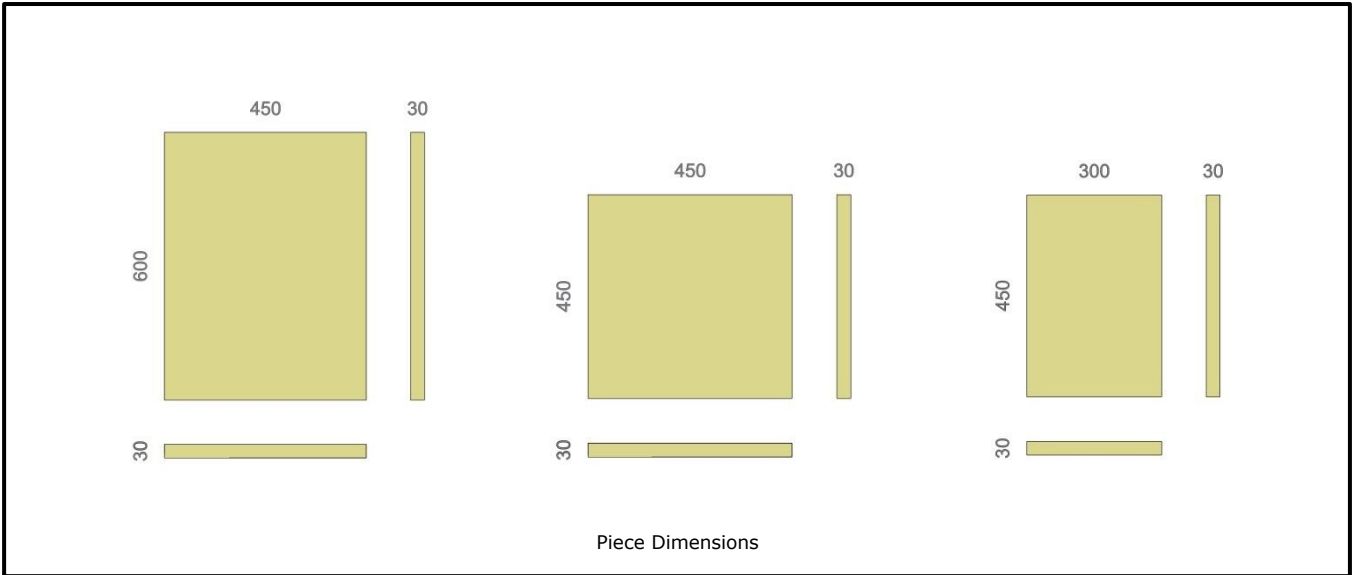

Product characteristics and package		Technical Specifications		
<b>Colors Available</b>		<b>EN 1339 – "Concrete paving flags – Requirements and test methods"</b>		
<b>Dimensions</b>	600 x 450   450 x 450   450 x 300 Thickness 30	<b>Intended use</b>	<b>Internal Flooring</b>	<b>External Flooring</b>
<b>Quantity per Pallet</b>	15,36 sqm	<b>Emission of asbestos</b>	Pass	Not Relevant
<b>Quantity per Module</b>	1,28 sqm	<b>Breaking Strength (MPa)</b>	≥ 3,5	≥ 3,5
<b>Module/Pallet</b>	12 modules 3 units – 600x450x30 1 units – 450x450x30 2 units – 450x300x30	<b>Slip/ Skid Resistance</b>	Satisfactory	Satisfactory
<b>Average weight/sqm</b>	66 kg	<b>Thermal Conductivity [W/(mk)]</b>	1,24	Not Relevant
<b>Average weight/Pallet</b>	1050 kg	<b>External fire performance</b>	Not Relevant	Not Relevant
<b>Approved</b> Vitor Silva	<b>Elaborate</b> Bruno Veloso	<b>Durability</b>	Satisfactory	Satisfactory
		<b>Reaction to fire</b>	Classe A1	Not Relevant
		<b>PTDS n°:</b> ROMAN_001_EN	<b>Date</b> 09-09-2016	