


ARDÓSIA FLOORING

units: mm



Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.

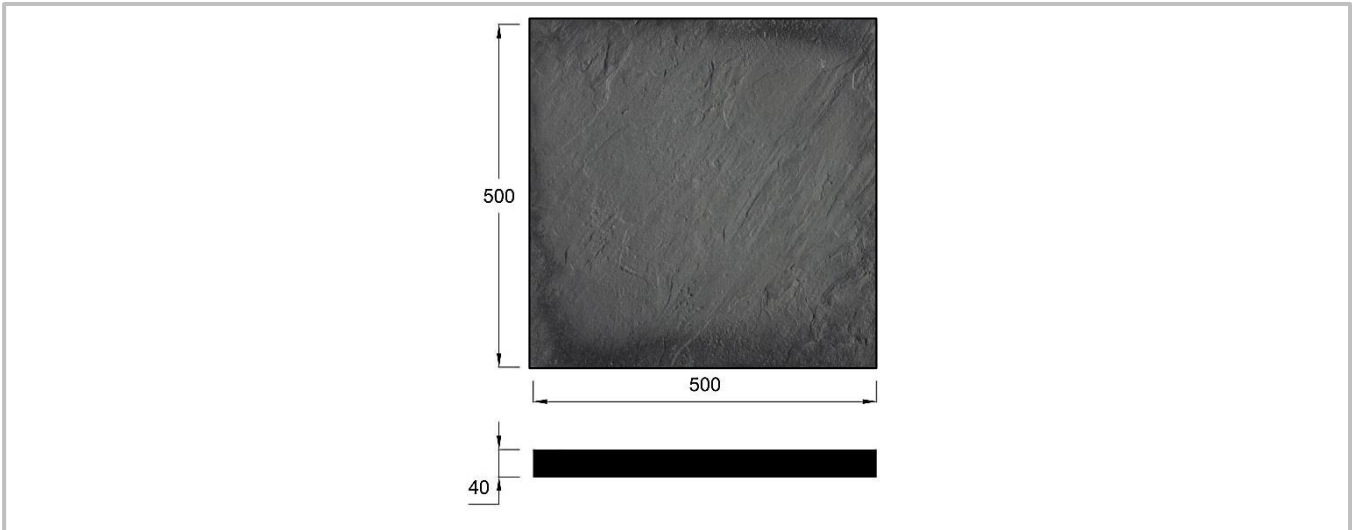

Mod. 635/2



Mod. 635/4

Product characteristics and package		Technical Specifications		
		EN 1339 – “Concrete paving flags – Requirements and test methods”		
Dimensions	500 x 500 x 40 <small>(length x width x thickness)</small>	Intended use	Internal Flooring	External Flooring
Items/Pallet	96 units	Emission of asbestos	Pass	Not Relevant
Items/Sqm	4 units	Breaking Strength (MPa)	≥ 3,5	≥ 3,5
Sqm/Items	0,25 sqm	Slip/ Skid Resistance	Satisfactory	Satisfactory
Sqm/Pallet	24 sqm	Thermal Conductivity [W/(mk)]	1,24	Not Relevant
Average weight/sqm	90 kg	External fire performance	Not Relevant	Not Relevant
Average weight/Items	22,50 kg	Durability	Satisfactory	Satisfactory
Average weight/Pallet	2160 kg	Reaction to fire	Classe A1	Not Relevant
Approved Vitor Silva	Elaborate Bruno Veloso	PTDS nº: IARD_003_EN	Date: 05-12-2017	