


### CAPITONÉ 250 x 250 x 15/25

units: mm


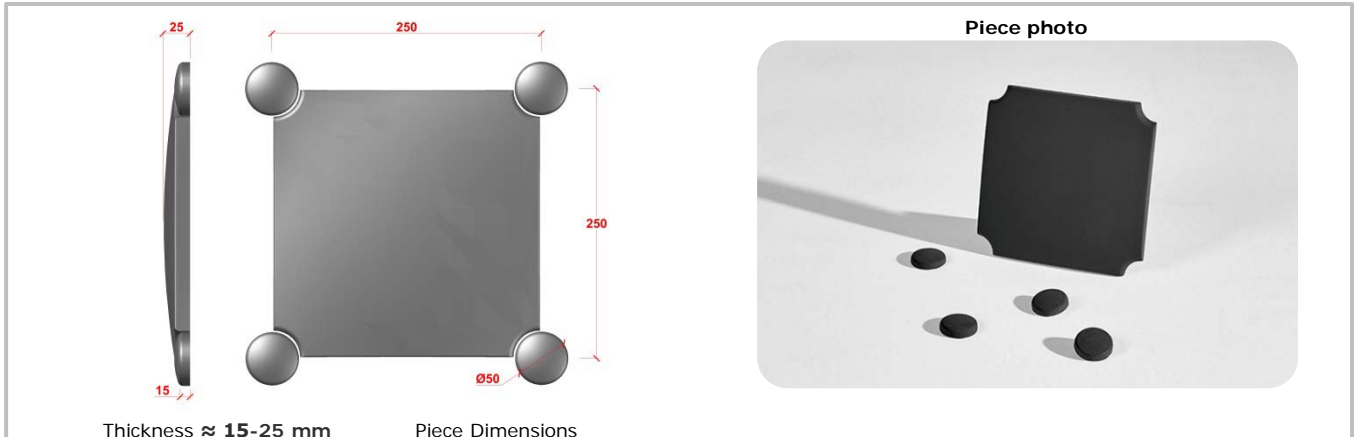


Thickness  $\approx$  15-25 mm

Piece Dimensions

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.

#### Available Colors

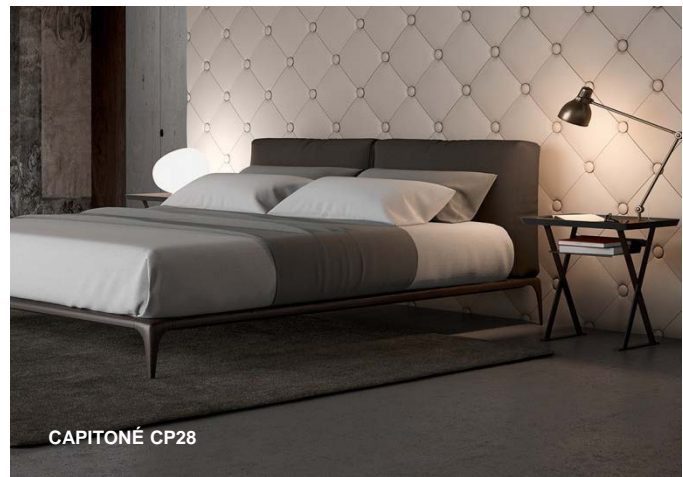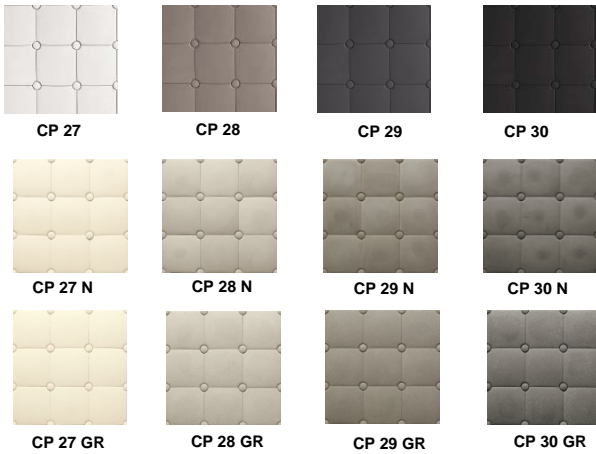

CAPITONÉ CP28

#### Product characteristics and package

<b>Product Type</b>	<b>Flat Elements</b>
<b>Quantity per Pallet</b>	27 sqm
<b>Quantity per Box</b>	0,75 sqm
<b>Items/sqm</b>	16 Units
<b>Items/Box</b>	12 Units
<b>Boxes/Pallet</b>	36 Boxes
<b>Average weight/sqm</b>	42 kg
<b>Average weight/Box</b>	31,3 kg
<b>Average weight/Pallet</b>	1164 kg With Pallet
<b>Approved:</b> Vitor Silva	<b>Elaborate:</b> Bruno Veloso

#### Technical Specifications

<b>Product Classification</b>	EN 14618	Concrete Coating
<b>Surface Quality</b>	EN 14617-16	Visual Inspection
<b>Dimensions and Geometry</b>	EN 14617-16	Tolerances $\pm$ 5 mm
<b>Maximum Water Absorption</b>	EN 14617-1	$\leq$ 8 %
<b>Average Apparent Density</b>	EN 14617-1	2200 $\pm$ 50 kg/m <sup>2</sup>
<b>Freeze/Thaw Resistance</b>	EN 14617-5	Pass
<b>Flexural Strength</b> (after 25 cycles)	EN 14617-2	No change
<b>Thermal Shock Resistance</b>	EN 14617-6	Pass
<b>Flexural Strength</b> (after 20 cycles)	EN 14617-2	No change
<b>Minimum Flexural Strength</b>	EN 14617-2	7 MPa
<b>Compressive Strength Class</b>	EN 206	C30/37
<b>Minimum Compressive Strength</b>	EN 12390-3	$\geq$ 37 N/mm <sup>2</sup>
<b>Water Absorption by Capillary</b>	EN 772-11	$\leq$ 1 g/(m <sup>2</sup> .s)
<b>PTDS n°</b> CAP_001_EN	<b>Date:</b> 21/11/2019	