


### CONCRESTRIP 1000x100x15

units: mm



#### Available Colors

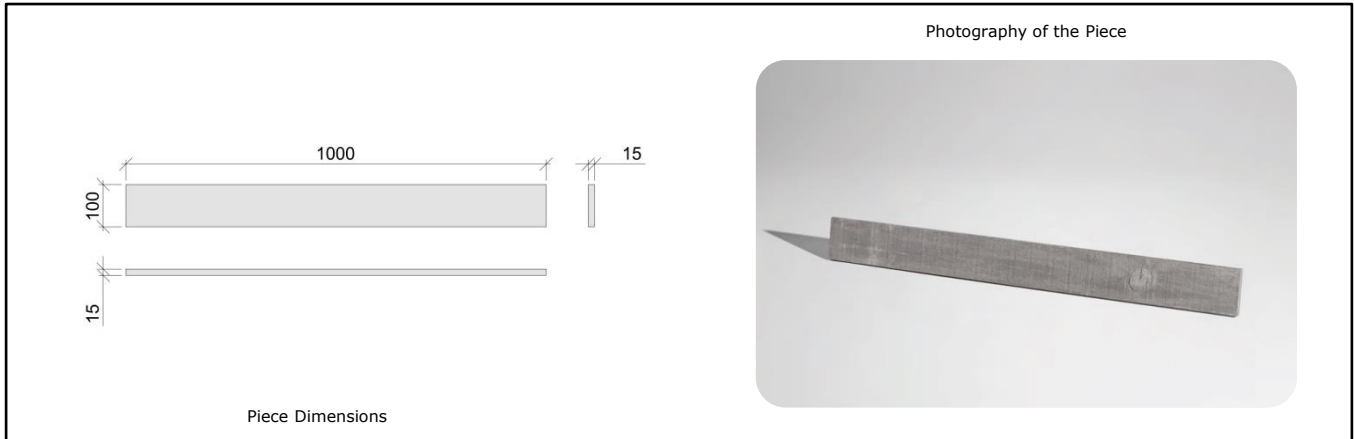

CS 28



CS 29



CS 28 GR



CS 29 GR



Product characteristics and package		Technical Specifications		
Product Type	Flat Elements	Product Classification	EN 14618	Concrete Coating
sqm/pallet	29,40 m <sup>2</sup>	Surface Quality	EN 14617-16	Visual Inspection
sqm/box	0,7 m <sup>2</sup>	Dimensions and Geometry	EN 14617-16	Tolerances ± 5 mm
Items/sqm	10 units	Maximum Water Absorption	EN 14617-1	≤ 8 %
Items/box	7 units	Average Apparent Density	EN 14617-1	2200 ±50 kg/m <sup>3</sup>
Box/pallet	42 units	Freeze/Thaw Resistance Flexural Strength (after 25 cycles)	EN 14617-5 EN 14617-2	Pass No Change
Average weight/sqm	34,3 kg	Thermal Shock Resistance Flexural Strength (after 20 cycles)	EN 14617-6 EN 14617-2	Pass No Change
Average weight/box	24 kg	Minimum Flexural Strength	EN 14617-2	7 MPa
Average weight/pallet	1050 kg	Compressive Strength Class Minimum Compressive Strength	EN 206 EN 12390-3	C30/37 ≥ 37 N/mm <sup>2</sup>
		Water Absorption by Capillary	EN 772-11	≤ 1 g/(m <sup>2</sup> .s)
Approved Vitor Silva	Elaborate Bruno Veloso	Ref. <sup>a</sup> PTDS CON_001_EN	Date 24-02-2020	