


RISCADO PLUS 1000 x 500 x 30

units: mm

Piece Dimensions

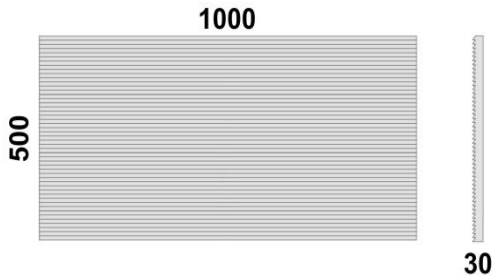

Photography - Piece



Photography - Corner



Available - Right Corner and Left Corner

Available Colors



Product characteristics and package

| Product Type | Flat Elements | Corners |
|----------------------------|---------------|---------|
| sqm/Wodeen Box* | 14 sqm | 14 sqm |
| sqm/item | 0,5 sqm | 0,5 sqm |
| Items/sqm | 2 un. | 2 un. |
| Items/Box | 28 un. | 28 un. |
| Average weight/sqm | 38,4 kg | 38,4 kg |
| Average weight/Item | 19,2 kg | 19,2 kg |
| Average weight/Wodeen Box* | 596 kg | 596 kg |

*Wodeen Box - Size
1100x1100x700 mm

Technical Specifications

| | | |
|---|--------------------------|-----------------------------------|
| Product Classification | EN 14618 | Concrete Coating |
| Surface Quality | EN 14617-16 | Visual Inspection |
| Dimensions and Geometry | EN 14617-16 | Tolerances ± 5 mm |
| Maximum Water Absorption | EN 14617-1 | ≤ 10 % |
| Average Apparent Density | EN 14617-1 | 1700±50 kg/m ³ |
| Freeze/Thaw Resistance Flexural Strength (after 25 cycles) | EN 14617-5 EN 14617-2 | Pass No Change |
| Thermal Shock Resistance Flexural Strength (after 20 cycles) | EN 14617-6 EN 14617-2 | Pass No Change |
| Minimum Flexural Strength | EN 14617-2 | 6 MPa |
| Compressive Strength Class Minimum Compressive Strength | EN 206 EN 12390-3 | LC30/33 ≥ 33 N/mm ² |
| Water Absorption by Capillary | EN 772-11 | ≤ 1 g/(m ² .s) |

Approved
Vitor Silva

Elaborate
Joana Ferreira

Ref.^a PTDS
RISP_001_EN

Date
29/01/2020