


RISCADO Flat Elements 500 x 150 x 25 | Corners 275 x 150 x 50 x 25

Units: mm

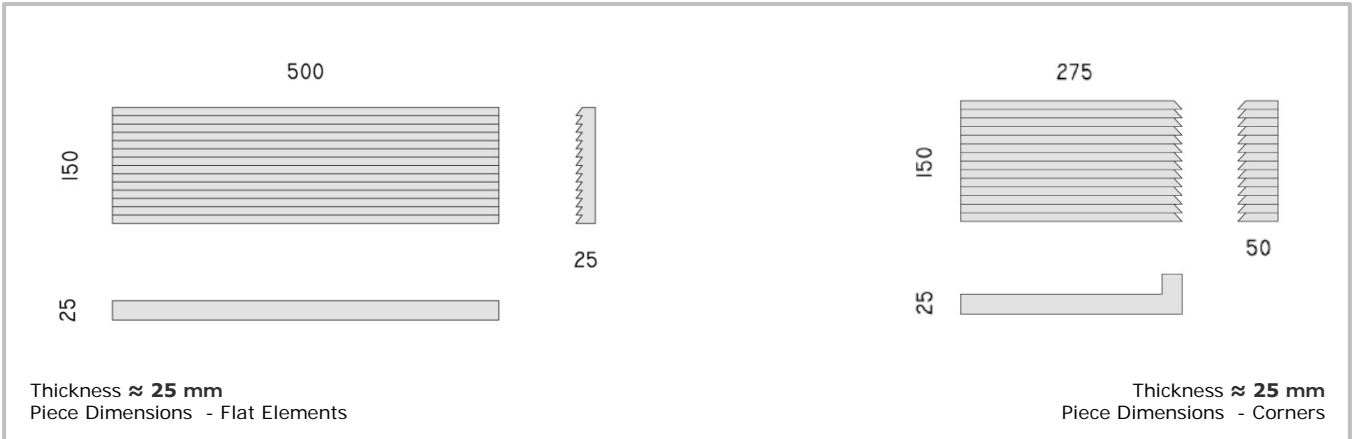

Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.

Available Colors



Product characteristics and package

Product Type	Flat Elements	Corners
Quantity per Pallet	36 sqm	72 lm
Quantity per Box	0,60 sqm	1,20 lm
Items/sqm	12,5 Units	7 Units
Items/Box	8 Units	8 Units 4 right / 4 Left
Boxes/Pallet	60 Boxes	60 caixas
Average weight/sqm	31,6 kg	10,8 kg
Average weight/Box	19 kg	13 kg
Average weight/Pallet	1170 kg With Pallet	810 kg With Pallet
Approved: Vitor Silva	Elaborate: Bruno Veloso	

Technical Specifications

Product Classification	EN 14618	Concrete Coating
Surface Quality	EN 14617-16	Visual Inspection
Dimensions and Geometry	EN 14617-16	Tolerances \pm 5 mm
Maximum Water Absorption	EN 14617-1	\leq 10 %
Average Apparent Density	EN 14617-1	1700 \pm 50kg/m ³
Freeze/Thaw Resistance Flexural Strength (after 25 cycles)	EN 14617-5 EN 14617-2	Pass No change
Thermal Shock Resistance Flexural Strength (after 20 cycles)	EN 14617-6 EN 14617-2	Pass No change
Minimum Flexural Strength	EN 14617-2	6 MPa
Compressive Strength Class Minimum Compressive Strength	EN 206 EN 12390-3	LC30/33 \geq 33 N/mm ²
Water Absorption by Capillary	EN 772-11	\leq 1 g/(m ² .s)
PTDS n ^o : RIS_001_EN	Date: 27/09/2019	