




STONE CORK 300 x 100 x 15/20/25 | 200 x 100 x 15/20/25 | 100 x 100 x 15/20/25

units: mm

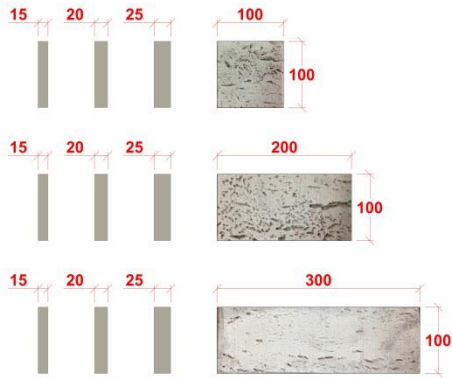

Thickness ≈ 15/20/25 mm

Piece Dimensions

Piece photo



Given the characteristics of aggregates and their photographic reproduction, there may be slight variations in particle size and tone.



STONE CORK SC35

Product characteristics and package

Technical Specifications

Product characteristics and package				Technical Specifications			
Colors Available	SC 11	SC 33	SC 34	SC 35	Product Classification	EN 14618	Concrete Coating
Product Type	Flat Elements			Surface Quality	EN 14617-16	Visual Inspection	
Quantity per Pallet	34,02 sqm			Dimensions and Geometry	EN 14617-16	Tolerances ± 5 mm	
Quantity per Box	0,54 sqm			Maximum Water Absorption	EN 14617-1	≤ 10 %	
Items/sqm	50 Units			Average Apparent Density	EN 14617-1	1700 ±50kg/m³	
Items/Box	27 Units			Freeze/Thaw Resistance Flexural Strength (after 25 cycles)	EN 14617-5 EN 14617-2	Pass No change	
Boxes/Pallet	63 Boxes			Thermal Shock Resistance Flexural Strength (after 20 cycles)	EN 14617-6 EN 14617-2	Pass No change	
Average weight/sqm	30 kg			Minimum Flexural Strength	EN 14617-2	6 MPa	
Average weight/Box	16,20 kg			Compressive Strength Class Minimum Compressive Strength	EN 206 EN 12390-3	LC30/33 ≥ 33 N/mm²	
Average weight/Pallet	1050 kg With pallet			Water Absorption by Capillary	EN 772-11	≤ 1 g/(m².s)	
Approved: Vitor Silva	Elaborate: Bruno Veloso			PTDS nº: STO_001_EN	Date: 02-09-2016		